



KC200 KC200B



COMPACT CARD PERSONALIZATION MODULES FOR SELF-SERVICE KIOSKS

KC200 and KC200B printers offer cost-effective solutions to enable instant issuance of personalized plastic cards. The Evolis Premium SDK and the total accessibility of the various components and connectors allow KC200 and KC200B to be smoothly integrated into any type of self-service kiosks.

COMPACT AND ROBUST



- KC200 and KC200B printers successfully combine compactness and autonomy with a 200-card feeder.
- KC200 and KC200B benefit from Evolis latest innovations in card printing modules. The metal housing of these printers makes their integration into your system simpler and durable.

CONFIGURATION ON DEMAND

- You can easily configure card management: cards returned using an exit slot (bezel on KC200B printer) and different configuration possibilities like frontal or rear feeding and card exit.
- KC200 and KC200B solutions are fully modular: they can print either single or dual sided cards and can also be equipped with encoders for magnetic stripe or for contact and contactless smart cards.

EASY TO USE

- In order to limit and facilitate everyday maintenance operations, KC200 and KC200B printers offer remote notifications on the status of the printer and consumables such as the card or ribbon level alert.
- Thanks to the Evolis Premium SDK, you can integrate KC200 and KC200B into your own application and monitor them over a local network or the cloud.

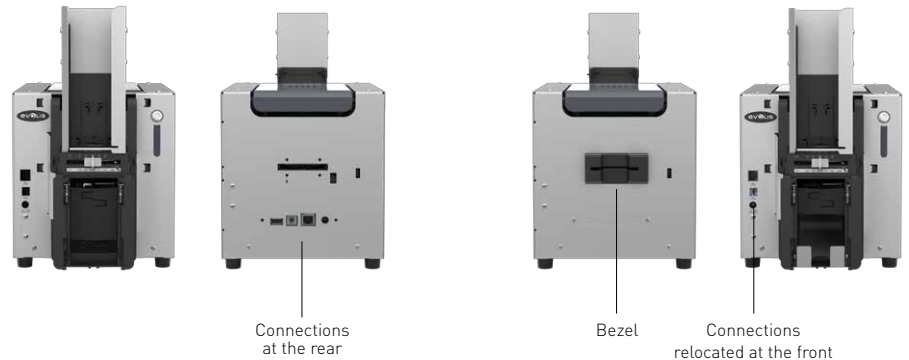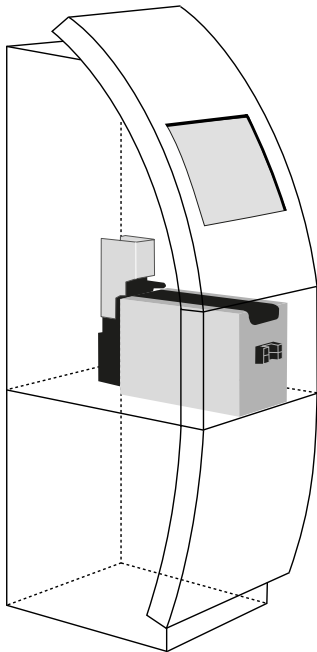

KC200

KC200B

MAIN FEATURES / Full technical specifications on www.evolis.com

GENERAL FEATURES

- Dual-sided printing module
- Edge-to-edge printing
- Color dye sublimation, monochrome thermal transfer
- Standard 300 x 300 dpi resolution
- Customizable 300 x 600 dpi resolution or 300 x 1200 dpi resolution (monochrome printing only)
- 32 MB memory (RAM)

PRINTING PERFORMANCES¹

- Single side:
 - Color (YMCKO): 20.5 s per card
 - Monochrome: 7 s per card
- Dual side:
 - Color (YMCKO-K): 28 s per card

INTERFACES

- USB
- Ethernet TCP-IP 10BaseT, 100BaseT (Traffic Led)

LOADING AND RETURNING CARDS

- Card input hopper: 200 cards (0.76 mm - 30 mil)
- Manual insertion with bezel (KC200B)
- Manual return or in the terminal output tray
- Ability to retract unretrieved cards thanks to the bezel (KC200B)
- Reject slot for defective cards

CARD SPECIFICATIONS

- Card thickness: 0.76 mm (30 mil)
- Card types: PVC cards, composite PVC cards, PET cards, ABS cards¹, special varnished cards¹
- Card format: ISO CR80 - ISO 7810 (53.98 mm x 85.60 mm)

ADDITIONAL ENCODING MODULES

- Available modules:
 - Magnetic stripe encoder ISO 7811 HiCo/LoCo
 - Contact smart card encoder - PC/SC, EMV 2000-1
 - Contactless smart card encoder - ISO 14443A, B, ISO15693, Mifare, DesFire, HID iCLASS
 - Other specific encoders upon request
- Internal USB or IP ports
- Options can be combined

SAFETY

- Data encryption for magnetic encoding

DISPLAY

- Printer LEDs
- Printer graphical notifications: empty input hopper, empty/low level ribbon alert...

EVOLIS HIGH TRUST® RIBBONS

To maximize the quality and durability of printed cards, the lifespan of the print head and the overall printer reliability, use Evolis High Trust® ribbons.

- Ribbon capacity:
 - YMCKO: 300 prints/roll
 - YMCKO-K: 200 prints/roll
 - ½ YMCKO: 400 prints/roll
 - KO: 600 prints/roll
 - Black monochrome ribbon: 2000 prints/roll¹
 - Other monochrome ribbons: 1000 prints/roll¹
 - SO-KO: 250 prints/roll
- Ribbon saver for monochrome printing

SOFTWARE

- Compatible with Windows® (32/64 bits): XP SP3, Vista, W7, W8, W10
- Mac OS X (from 10.5 onwards)
- Linux upon request
- Evolis Premium Suite®:
 - Printer driver
 - Evolis Print Center for printer administration and settings
 - Evolis Printer Manager for graphical notification²
 - 24/7 online support
- Evolis Premium SDK for remote supervision of the printer, while facilitating and speeding up integration into IT systems

ECO-FRIENDLY DESIGN, CERTIFICATIONS AND STATEMENT OF COMPLIANCE

- Standby, sleep modes & reduced energy consumption
- CE, FCC, ICES, VCCI, CCC
- RoHS

SIZE AND WEIGHT

- Size (H x W x D):
 - KC200: 307 x 199 x 379 mm (12.09" x 7.84" x 14.92") with feet: H: 322 mm (12.68")
 - KC200B: 307 x 199 x 398 mm (12.09" x 7.84" x 15.67") with feet: H: 322 mm (12.68")
- Weight:
 - KC200: 5.6 kg (12.34 lbs)
 - KC200B: 5.8 kg (12.78 lbs)

WARRANTY

- 1-year warranty (printer and print head)
- Warranty extension available as an option³

¹ Under specific conditions / ² Requires the .net 4.0 client profile version
³ Warranty subject to observance of specific conditions and use of Evolis High Trust® ribbons

