


SYSR86N-H3

SYRIS Network HF RFID Desktop Reader



Ethernet

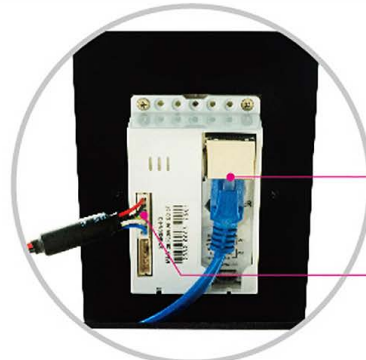

Power adapter



• Features

- HF Support ISO15693 / ISO14443A / ISO14443B / Mifare block
- Built-in 2 relay outputs to control the power ON/OFF
- Support Ethernet and Wi-Fi connection
- Provide utility and sample code

• Product specifications

ID	Serial Number	Card type	Tag UID	Time
132136.1.027	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:40
132136.1.028	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:41
132136.1.029	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:42
132136.1.030	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:43
132136.1.031	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:44
132136.1.032	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:45
132136.1.033	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:46
132136.1.034	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:47
132136.1.035	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:48
132136.1.036	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:49
132136.1.037	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:50
132136.1.038	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:51
132136.1.039	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:52
132136.1.040	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:53
132136.1.041	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:54
132136.1.042	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:55
132136.1.043	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:56
132136.1.044	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:57
132136.1.045	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:58
132136.1.046	202000C1	ISO15693	0000000000000000	2021/05/14 15:41:59
132136.1.047	202000C1	ISO15693	0000000000000000	2021/05/14 15:42:00

Frequency	13.56MHz
HF Protocols	ISO15693 / ISO14443A / ISO14443B / Mifare block
HF Read range	Up to 5 cm
Ethernet	10M/100M Ethernet Port
Wi-Fi	802.11 b/g/n
Status Indicator	Tricolor LED(RGB) & Beeper
Configuration Interface	Micro USB / Ethernet / Wi-Fi
Digital Output	2 Relay output
Power Supply	12 VDC
Power consumption	1W~6W
Operating temperature	-10°C to 60°C
Dimensions (mm)	125 x 86 x 89 mm

※ This specification is preliminary and subject to change without prior notice.